

Revised 7/25/2017

TOOLS NEEDED: 5MM ALLEN WRENCH  
6MM WRENCH  
8MM COMBINATION WRENCH

12MM WRENCH  
PHILLIPS SCREWDRIVER  
DRILL

1/4" DRILL BIT  
CONTACT CLEANER

1. FOR THE VALKYRIE AND VALKYRIE TOUR MODELS REMOVE THE 6MM BOLT AT REAR OF THE PASSENGER SEAT, THIS LOOSENS THE TOP OF THE FENDER.
2. FOR THE VALKYRIE INTERSTATE MODEL REMOVING THE SEAT IS NECESSARY TO GET TO THE TOP FENDER BOLT. REMOVE ON SIDE OF THE SEAT STRAP USING A 12MM WRENCH. UNLOCK THE SEAT WITH THE KEY AND REMOVE THE SEAT. REMOVE THE 5MM ALLEN BOLT ON THE TOP OF THE FENDER TO LOOSEN THE TOP OF THE FENDER.
3. REMOVE THE REAR 12MM BOLTS, WASHERS AND SPACERS ON THE FENDER STRUTS.  
**NOTE:** FENDER WILL BE LOOSE, BE CAREFUL NOT TO SCRATCH THE FENDER WHEN REMOVING IT.
4. ATTACH THE RUBBER GASKETS TO THE INSIDE OF THE REAR FENDER EXTENSION IN THE AREAS SHOWN. FIG. #1. BEFORE ATTACHING, THOROUGHLY CLEAN THE SURFACE WITH A CONTACT CLEANER.
5. POSITION THE REAR FENDER EXTENSION ON THE REAR FENDER AND MARK THE FENDER AT EACH OF THE TWO INNER HOLES IN THE EXTENSION AS SHOWN. FIG #2.
6. REMOVE THE EXTENSION AND LIGHTLY CENTER PUNCH THE MARKS. USING A DRILL AND 1/4" DRILL BIT, DRILL A 1/4" HOLE THROUGH EACH CENTER PUNCHED MARK. FIG. #3
7. POSITION THE EXTENSION ON THE REAR FENDER AGAIN AND TEMPORARILY INSTALL THE TWO 5 X 9.5MM SCREWS AND 5MM FLANGE NUTS (INCLUDED) FIG #4. MARK THE REAR FENDER AT EACH OF THE REMAINING TWO OUTER HOLES IN THE EXTENSION, AND THEN REMOVE THE EXTENSION FROM THE REAR FENDER. LIGHTLY CENTER PUNCH THE MARKS. FIG. #5.
8. USING A DRILL AND 1/4" DRILL BIT, DRILL A 1/4" HOLE THROUGH EACH CENTER PUNCHED MARK. FIG #6.
9. INSTALL THE REAR FENDER EXTENSION.
10. REINSTALL THE REAR FENDER IN THE REVERSE ORDER OF REMOVAL.

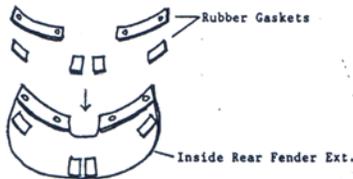


Fig. 1

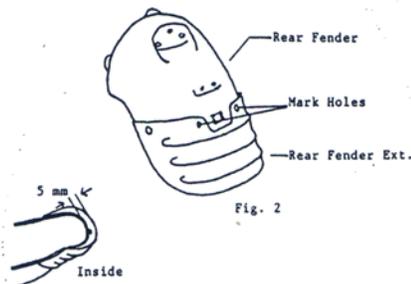


Fig. 2

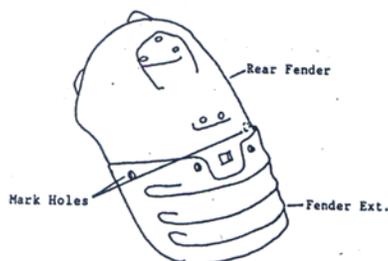



Fig. 4




Fig. 5

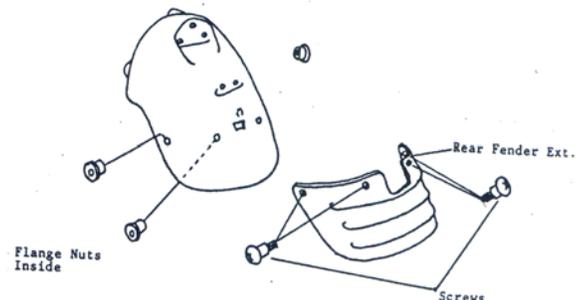


Fig. 6