


PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.

INSTALLATION:

1. CLEAN THE HEADLIGHT LENS AND THE INSIDE OF THE LAMPGARDS WITH RUBBING ALCOHOL AND LET DRY.
2. REMOVE THE PROTECTIVE FILM FROM THE BACK OF ONE OF THE DUAL LOCK FASTENERS AND ADHERE IT TO THE INSIDE OF THE LAMPGARD.
3. USE THE DIAGRAM BELOW TO POSITION EACH OF THE FASTENERS. PLACE 3 ON THE LAMPGARD.
4. PLACE THE MATES FOR THE DUAL LOCK FASTENER TO THE ONES ON THE LAMPGARD. (NOTE: THESE DUAL LOCKS MATE TO EACH OTHER.)
5. PLACE THE LAMPGARD ON THE HEADLIGHT SO THE DUAL LOCK FASTENERS STICK TO THE HEADLIGHT. ONCE IN PLACE, REMOVE THE LAMPGARD LEAVING THE MATE OF THE DUAL LOCK FASTENERS ON THE HEADLIGHT AND THE OTHER MATE ON THE LAMPGARD. THE DUAL LOCK FASTENERS NEED TO SIT ON THE LAMPGARD AND ON THE BIKE FOR 24 HOURS BEFORE EXPOSED TO WEATHER OR LOAD FOR PROPER ADHESION OF THE TAPE.

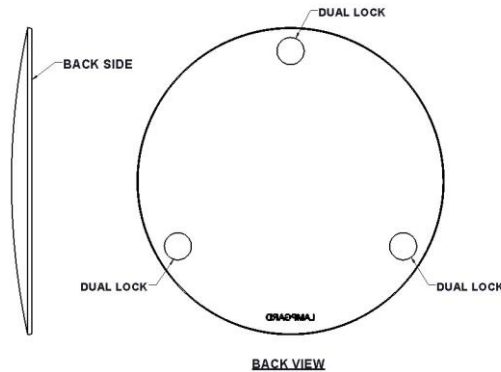

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.

INSTALLATION:

1. CLEAN THE HEADLIGHT LENS AND THE INSIDE OF THE LAMPGARDS WITH RUBBING ALCOHOL AND LET DRY.
2. REMOVE THE PROTECTIVE FILM FROM THE BACK OF ONE OF THE DUAL LOCK FASTENERS AND ADHERE IT TO THE INSIDE OF THE LAMPGARD.
3. USE THE DIAGRAM BELOW TO POSITION EACH OF THE FASTENERS. PLACE 3 ON THE LAMPGARD.
4. PLACE THE MATES FOR THE DUAL LOCK FASTENER TO THE ONES ON THE LAMPGARD. (NOTE: THESE DUAL LOCKS MATE TO EACH OTHER.)
5. PLACE THE LAMPGARD ON THE HEADLIGHT SO THE DUAL LOCK FASTENERS STICK TO THE HEADLIGHT. ONCE IN PLACE, REMOVE THE LAMPGARD LEAVING THE MATE OF THE DUAL LOCK FASTENERS ON THE HEADLIGHT AND THE OTHER MATE ON THE LAMPGARD. THE DUAL LOCK FASTENERS NEED TO SIT ON THE LAMPGARD AND ON THE BIKE FOR 24 HOURS BEFORE EXPOSED TO WEATHER OR LOAD FOR PROPER ADHESION OF THE TAPE.

