

CIRO® ENGINE GUARD TOE RESTS


PARTS INCLUDED

- 2 Toe rests
- 2 Clamps
- 1 Hardware kit

INSTALLATION INSTRUCTIONS:

- 1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.
- 2. Prepare the clamp and engine guard surface by using soap and hot water to remove any dirt followed by an ammonia based glass cleaner to remove any wax or oil.
- 3. Hold the footrest and clamp around the engine guard. Install the 1/4-20 cap screws. Leave them loose. Repeat on the other side.
- 4. Sit on the motorcycle and then adjust the toe rest position.
- 5. Once the toe rests are in the final position, tighten the outside screw (A) until that side of the toe rest and clamp halves come together with no gap.
- 6. Tighten the inside screw (B). TORQUE 6 lbf-ft (8 N-m 0.8kgf-m)

CAUTION: Ciro recommends a thread locking fluid such as 3M Scotch-Weld TL-43 for this installation.

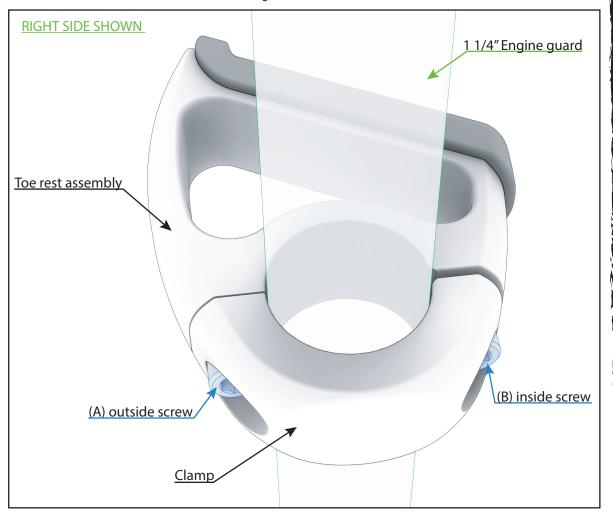

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro® warrants that products sold hereunder to the original purchaser, if maintained and operated under normal conditions, shall be free from any defects in materials and workmanship for a period of (3) years from date of purchase, and a lifetime warranty against LED failure.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products.

Please visit our website Ciro3d.com for our complete warranty policy.

